



NeoPro5i True Ribbon Tweeter


FEATURES

- strong Neodymium magnet
- 5 inch enforced sandwich diaphragm
- high power, high sensitivity
- build-in impedance convertor
- low distortion, very fast transition

Parameter	
Sensitivity	100dB/1m/2.83v
Power handling	60W nominal, 120W max
Frequency range	850-40,000Hz
Nominal impedance	7 ohm
DCR	0.02 ohm
Ribbon dimension	15mmX145mmX0.015mm
Effective ribbon area	2175square millimeter
Ribbon weight	88 milligram
Gap flux	1.0 Telsa average
Gap height	5 millimeter
Recommend crossover frequency	1,500Hz with 4-order
Net. Weight	2840 gram



SPL vs Freq

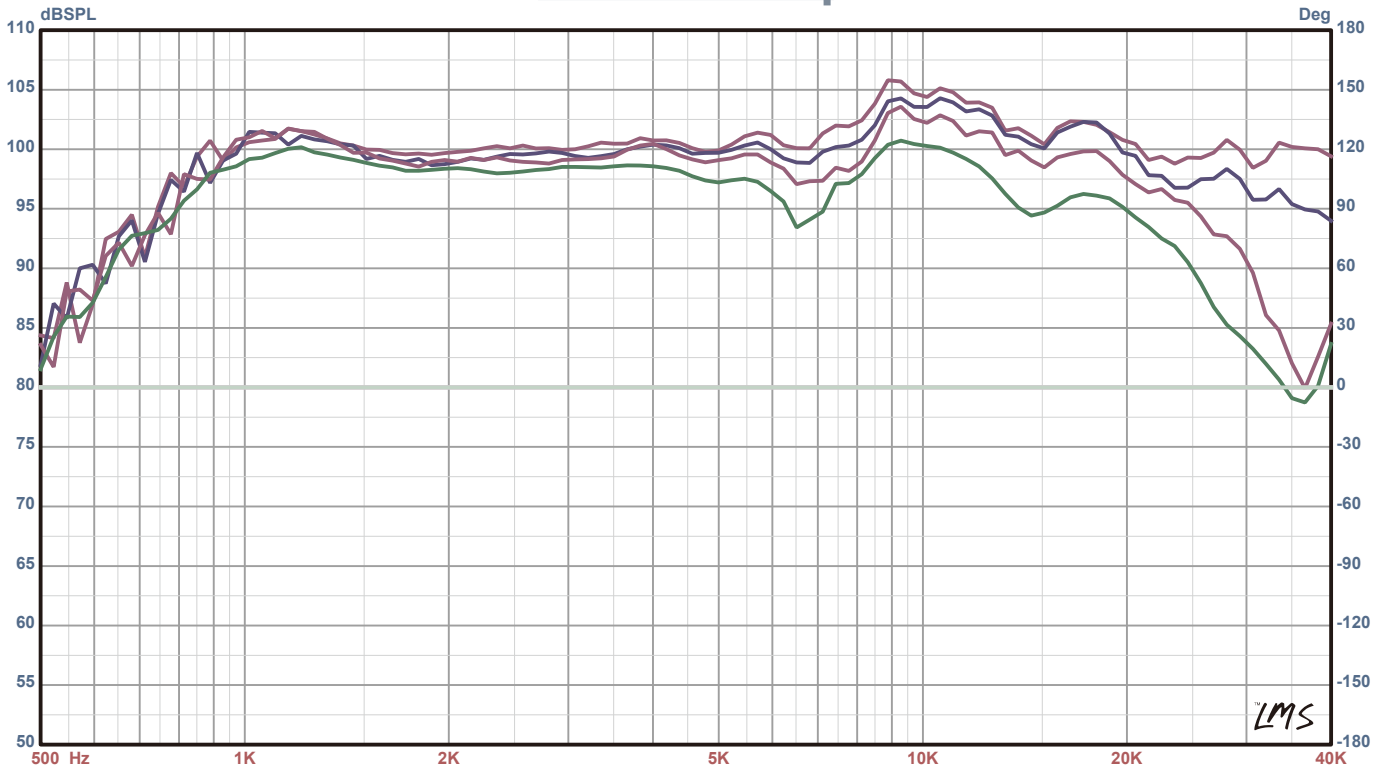

horizontal diffusion: on-axis, 15 degree , 30 degree, 45 degree

SPL vs Freq

